

IF3051A



Features and Benefits



- Waterproof:

Adopt new patent of air filter device for preventing moisture condensation inside the luminaire.

- Mounting:

Vertical & horizontal angle adjustment.

- Quality components:

- 1.Integrated heating solution to guarantee the LED luminous efficiency and life span.
- 2.Imported silicon rubber material is adopted for waterproof gask
- 3.Low voltage converter: DC24V

Technical Parameter

Product type	IF3051A
LED	LUMILEDS
Single LED Wattage	1W
LED life span and warranty	50,000 hours, 2 years warranty
LED Quantity	9 pcs
LED color (single color)	Warm White
LED color (color changing)	Multiple colors can be created
Beam angle	40 degree
Housing	6063 aluminium,diamond silver color finish
Glass material	5mm thickness tempered frosted glass
Power cable	2x1.0mm ² rubber cable(Single color); 3x1.0mm ² rubber cable(Color changing)
Power input	DC 24V
LED driver	350mA constant driver
Power consumption	10W
Ingress protection	IP66
Classification	III
Control	DMX512 Compatible
Ambient operating Temperature	-20°C to +55°C (Ta +10°C)
Net weight	1.0 Kg

Code & Reference


20113341 IF3051A-9X1W-40deg-RE-WW-(DC24V)
 20113342 IF3051A-9X1W-40deg-RE-RGB-(DC24V)

Available beam angles:

Single color: 15°, 25°, 40°, 60°

RGB: 15°, 25°, 40°, 60°

Dimensions (mm)

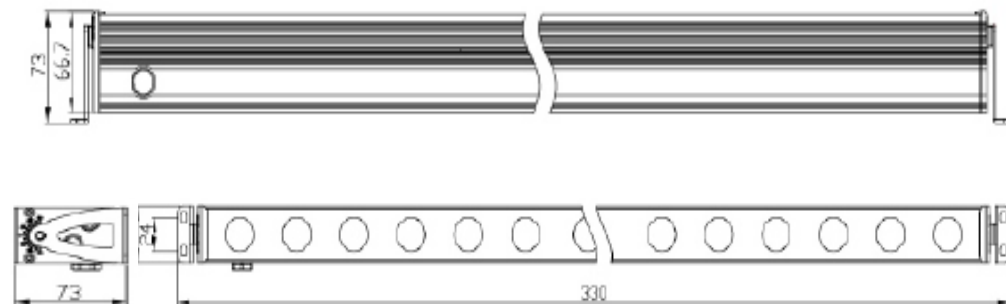

System Control (single color)



Remarks:
 (1) Maximum serial connective number of lights is 15PCS, new power cable is needed for over 15PCS;

System Control (color changing)

